



RSP200D

200W Monocrystalline Solar Panel

Key Features

The Renogy 200W solar panels offer more power and durability. Corrosion-resistant aluminum frame. Larger cell size and conversion efficiency for more power output per surface area.

- High module conversion efficiency
- Top ranked PTC rating
- Quick and inexpensive mounting
- 100% EL testing on all Renogy modules
- No hot spots guaranteed

Potential Uses

The Renogy 200W Monocrystalline Solar Panel has applications in off-grid power systems. That includes 12 and 24 volts battery banks, water pumping systems, signaling systems, and other off-grid applications.



Power Output Warranty



Material and Workmanship Warranty

RSP200D

200W Monocrystalline Solar Panel

Electrical Data

Maximum Power at STC	200 W
Open Circuit Voltage (V_{oc})	23 V
Short Circuit Current (I_{sc})	11.05 A
Optimum Operating Voltage (V_{mp})	19.2 V
Optimum Operating Current (I_{mp})	10.42 A
Module Efficiency	19.2%
Maximum System Voltage	600 VDC UL
Maximum Series Fuse Rating	20 A


Thermal Characteristics

Operating Module Temperature	-40°C to +80°C
Nominal Operating Cell Temperature (NOCT)	47±2°C
Temperature Coefficient of P_{max}	-0.37%/°C
Temperature Coefficient of V_{oc}	-0.28%/°C
Temperature Coefficient of I_{sc}	0.05%/°C

Junction Box

IP Rating	IP 65
Diode Type	20SQ045
Number of Diodes	2 Diode(s)
Output Cables	14 AWG (2.6 ft long)

Module Diagram

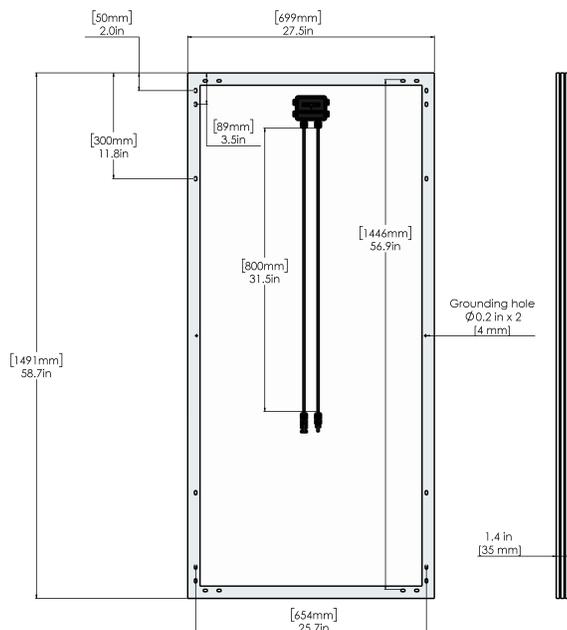

*All specifications and data described in this data sheet are tested under Standard Test Conditions (STC - Irradiance: 1000W/m², Temperature: 25°C, Air Mass: 1.5) and may deviate marginally from actual values. Renogy and any of its affiliates has reserved the right to make any modifications to the information on this data sheet without notice. It is our goal to supply our customers with the most recent information regarding our products. These data sheets can be found in the downloads section of our website, www.renogy.com

Mechanical Data

Solar Cell Type	Monocrystalline (6.5 x 3.3 in)
Number of Cells	68 (4 x 17)
Dimensions	1491 x 699 x 35 mm / 58.7 x 27.5 x 1.4 in
Weight	12 kg / 26.4 lb
Front Glass	Tempered Glass 0.13 in (3.2 mm)
Frame	Anodized Aluminium Alloy
Connectors	MC4 Connectors
Fire Rating	Class C

MC4001 Connectors

Rated Current	35 A
Maximum Voltage	1000 VDC
Maximum AWG Size Range	12 AWG
Temperature Range	-40°F to 194°F
IP Rating	IP 68

Certifications

Electrical Performance

